

Local Run Control

version 2.2

The local run control is intended to be used when running in standalone mode, i.e. with only the TPC readout. This is the case e.g. if one wants to do a pedestal run, local data taking, or some test. The local run control user interface is shown in figure LCR-1. In figure LCR-2 is the program flow and communication with the ilcserver shown. It is written in Java, and use a thread for receiving information from the ilcserver. The IP-address and port on the ilcserver machine is read from the file `ilcdaq.txt`, to be placed in the running directory.

SERVER 130.235.185.182

PORT 8000

- SERVER xxxx.xxxx.xxxx.xxxx – IP-number of the ilcserver
- SERVER.PORT n – port number that the ilcserver listens on.
- PORT n – port number that the local run control listens on.

While the DAQ is stopped can one switch on/off ('*PowOn*'/'*PowOff*') the front end cards. It is not possible to change the settings, this has to be done in the configuration file of the RCU (in `rcu-<id>.cfg` item `RCU.POWER`). The colors indicate the knowledge of the power status:

- light blue: FEC should be off according to the configuration file. Hardware status unknown.
- dark blue: FEC should be on according to the configuration file. Hardware status unknown.
- red: FEC is off according to the hardware status flag in the RCU.
- green: FEC is on according to the hardware status flag in the RCU.

While the DAQ is stopped can one load the settings for the PCA16 chips, '*PcaLoad*'. In contrast with the power can one change the settings. These are stored in a configuration file by the readout program. It is not possible to read the values loaded into the PCA16, what is shown is always the content of the configuration file.

Since it takes some time to power on and load the PCA settings is this not done automatically, it must be done manually in the way described, before any DAQ handling is started. The reason is to avoid delays in the run handling for local/global run control for things not often changed.

What follows is valid only for the local run control.

There are three run types, to be specified before start of run:

- physics – normal data taking, in this mode must the readout program configure a physics trigger
- pedestals – in this mode must the readout program configure a pulser trigger/random trigger.
- test – not implemented

Pedestal subtraction and zero suppression can be specified, zero suppression will force pedestal subtraction. For pedestal runs are these disabled.

To enable the readout to send events for the monitoring task must the value in '*Monitor*' be nonzero. After a request for an event from the monitoring program is this the number of events taken before a new request is served, i.e. a sort of downscaling. If '*Events*' is set to a nonzero value, then the run will stop automatically when this number of events has been taken.

By checking 'Logging' will a data file be written by the readout program.

A run comment can be added to the run log file, which is written by the readout program. It will be sent when pressing '--- Write run comment ---', it is not written at start of run but immediately.

In the message window is the communication with the ilcserver shown.

The readout can be in several states: the DAQ is running/stopped, a run is running/stopped/paused. These states is controlled from the buttons on the local run control display. The meaning of the buttons change depending on the state.

- Start DAQ – this will tell the readout program to open DRORC devices, setting up memories ...
- Stop DAQ – close devises and disable memories.
- Start run – start a run
- Pause run – pause an active run
- Continue run – continue an active run
- Stop run – stop an active run

A green button can be pressed, a red is disabled, and a blue indicates the system is busy. The status of the readout can be requested with the 'Status' button. At a regular interval is the readout task sending the number of events taken. In case an error is encountered the 'Status' button is turned into red.

Power settings

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

RCU0

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

RCU1

RCU2

RCU3

PowOn

PowOff

PCA settings

☒ Polarity ☐ Shutdown ☐ Preamp enable

0 Gain 0 Shaper 0 Decay time

Pcaload

Start DAQ

DAQ stopped

Start run

Pause

Run stopped

Status

[2008-06-18 13:42:54] SERVER: 130.235.185.182 PORT: 8000

[2008-06-18 13:42:54] Program started

[2008-06-18 13:42:54] Server started

[2008-06-18 13:42:54] SRV: CONNECTED

[2008-06-18 13:42:54] SRV:*STATUS DAQ 0 RUN 0 LOG 0 MON 0 EVT 0 TYPE 0 MODE 1 RUNNB 9999 ERR

[2008-06-18 13:42:55] Retrieving power status...

[2008-06-18 13:42:55] SRV:*POW S0 1 RCU0 2 S1 2 RCU1 0 S2 2 RCU2 0 S3 2 RCU3 0

[2008-06-18 13:42:55] Retrieving PCA settings...

[2008-06-18 13:42:55] SRV:*PCA SR 128 DAC 0 ERR 0

[2008-06-18 13:44:36] Powering on...

[2008-06-18 13:44:37] SRV:*POW S0 0 RCU0 2 S1 2 RCU1 0 S2 2 RCU2 0 S3 2 RCU3 0

Events: 0

Run:9999

[2008-06-18 13:42:54]

Exit

Run comment (max 240 characters):

Write run comment ---

Run type:

Run mode:

☒ Physics ☐ Pedestals ☐ Test

☒ Pedestal subtraction ☐ Zero suppression ☐ Logging

Monitor 0 Events 0

Figure LCR-1: Local Run Control user interface

The protocol between the local run control and the ilcserver are text strings sent over the network, as shown in figure LCR-2. When the run control starts up it sends *SRV to the ilcserver, and starts a thread listening for incoming packets from the ilcserver. The ilcserver sends back *STATUS when receiving the *SRV command. At Start DAQ is *START sent, after receiving *STATUS, is *POW sent to retrieve the current power settings of FEC, and finally *PCA to get the PCA16 settings used. *POW and *PCA is also sent when pressing the 'PowOn'/'PowOff' and 'PcaLoad'. The readout sends back the same string with status arguments. 'Stop DAQ' will send *STOP, 'Start Run' *SOR, 'End Run' *EOR, 'Pause' *PAUSE, 'Continue' *CONT, for these will the readout send back *STATUS.

***CONT** – *continue a paused run.*

no arguments, ilcserver returns *STATUS.

***EOR** – *end an active run.*

no arguments, ilcserver returns *STATUS.

***PAUSE** – *pause an active run.*

no arguments, ilcserver returns *STATUS.

***PCA** – *load/get PCA16 settings.*

if no argument get the settings used. Arguments are

*PCA SR n DAC n

- SR n – n is the pattern for the shift register setting individual bits to PCA
- DAC n – n is the DAC value to set for the decay time

***POW** – *power on/off front end cards.*

It has one argument when sent from run control:

*POW n – n=0, get current status, n=1 power on active FEC, n=2 power off all FEC

The readout sends back:

*POW S0 n0 RCU0 m0 S1 n1 RCU1 m1 S2 n2 RCU2 m2 S3 n3 RCU3 m3

Sn nX = Source of information RCU id n, nX=0 from hardware, nX=1 from file, nX=2 no information

RCUn mX = pattern giving status for RCU id n, bit on = power is on, bit off = power is off.

***SOR** – *start of run.*

no arguments, ilcserver returns *STATUS.

***SRV** – *sent by local run control to start communication.*

no arguments, ilcserver returns *STATUS.

***START** – *start data acquisition.*

*START CONTROL n MODE n TYPE n

- CONTROL n – n=1 I'm the local run control (needs to be rethought of!!).
- MODE n – n=1 physics, n=2 pedestals, n=3 test (not yet used).

- TYPE n – n=0 no pedestal subtraction/zero suppression, n=1 pedestal subtraction, N=3 pedestal subtraction and zero suppression.

***STATUS** – *current status.*

*STATUS is sent without any arguments from the run control to get the current status, it has a number of arguments as received from the ilcserver.

*STATUS DAQ n RUN n LOG n MON n EVT n MODE n RUNNB n ERR n

- DAQ n – DAQ status; n=0 DAQ is stopped, n=1 DAQ is active
- RUN n – RUN status; n=0 RUN is stopped, n=1 RUN is running, n=2 RUN is paused
- LOG n – Logging status; n=0 no data file written, n=1 data file written
- EVT n – Events taken
- TYPE n – run type; n=0 no pedestal subtraction/zero suppression, n=1 pedestal subtraction, n=3 pedestal subtraction and zero suppression.
- MODE n – run mode; n=1 physics, n=2 pedestals, n=3 test
- RUNNB n – n = the run number as given by the readout program
- ERR n – error status; n=0 no error, n>0 some obscure error number

***STOP** – *stop data acquisition.*

no arguments, ilcserver returns *STATUS.

***UPD** – *update information from readout.*

sent by the readout at a regular interval.

*UPD EVT n

- EVT n – n=number of events taken

FILES

DaqPanels.java	JAVA source code
ilcdaq.txt	configuration file
readme.txt	updates made

COMPILE AND RUN

```
javac DaqPanels.java
```

```
java DaqPanels
```

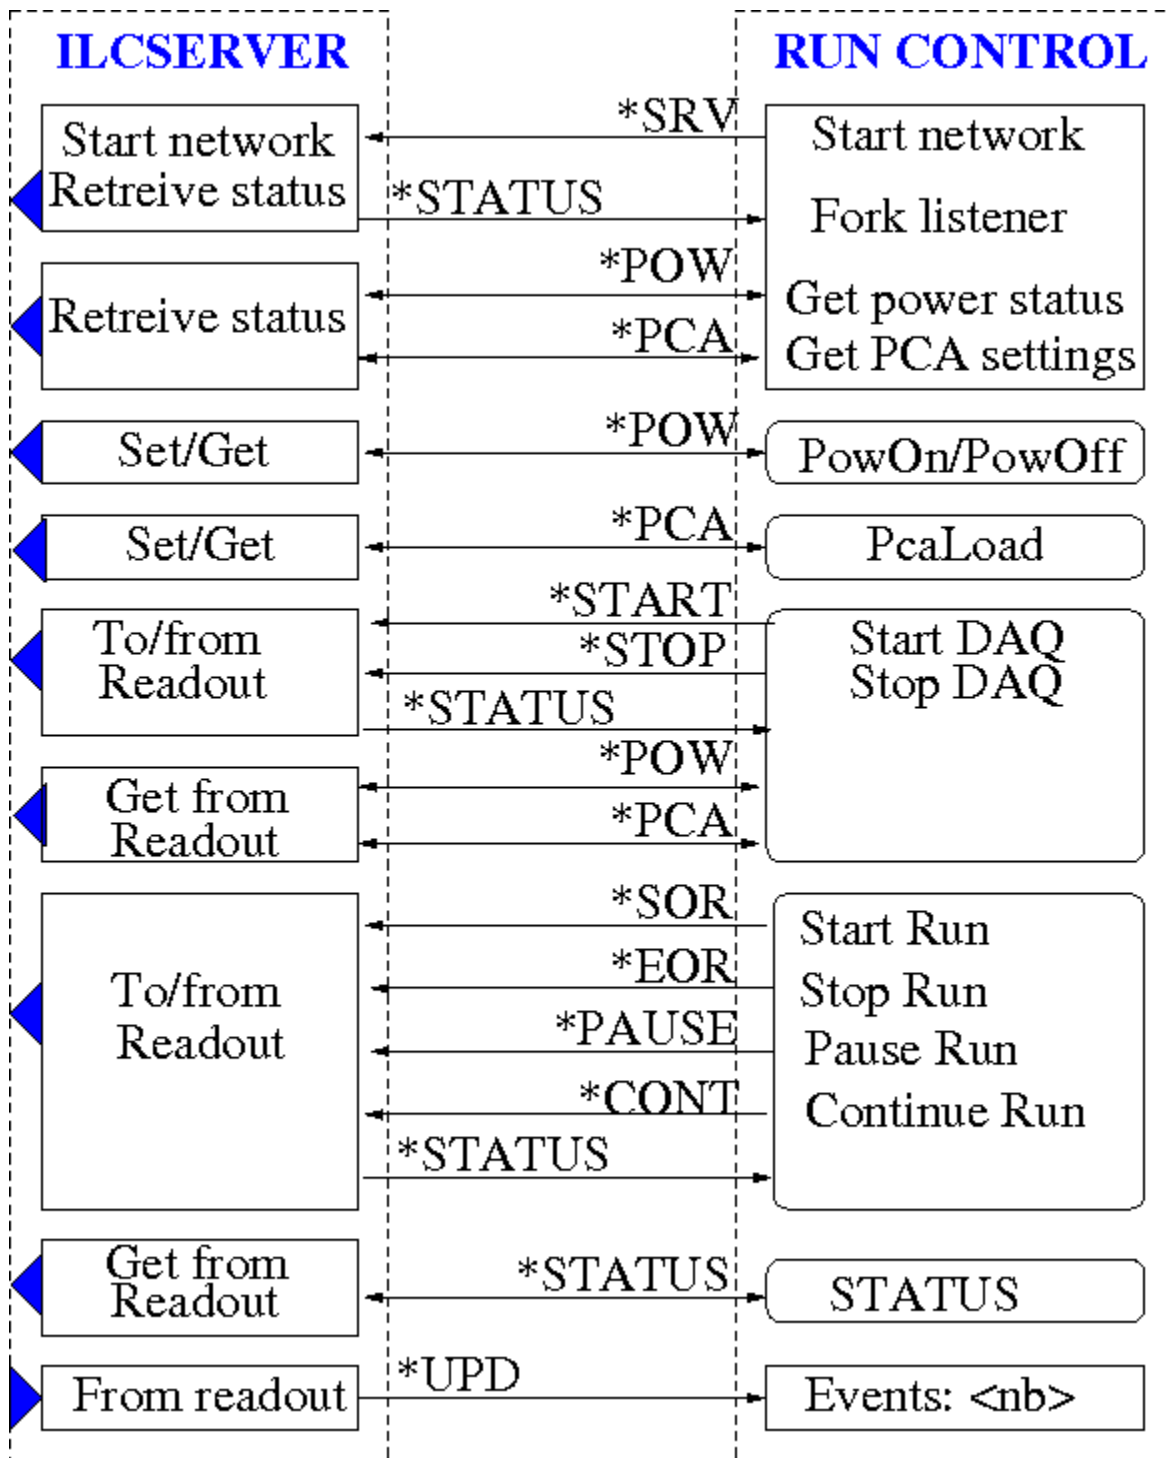


Figure LCR-2: Local Run Control communication with ilcserver.

